

**Speed Queen**

**MULTI-HOUSING  
E-MECH FRONTLOAD WASHER**

SWR961  
SWR963



**Speed Queen®**

OUR STRENGTH COMES FROM WITHIN

# E-MECH FRONTLOAD WASHER SPECIFICATIONS



## COMMERCIAL QUALITY

As America's largest commercial laundry equipment manufacturer, Speed Queen stands for quality, convenience, and efficiency. We've combined innovative technology with proven commercial quality to provide multi-housing laundries with state-of-the-art, cost effective laundry units.

## Commercial Quality Features

- Long-lasting cast aluminum trunion and bearing housing
- Heavy-duty 3/4 HP drive motor with reversing wash action
- 18 lb capacity stainless steel inner and outer tubs, and lifting baffles
- See-through door to view washing
- Cycle status lights indicate when unit is "in use" with "door locked" plus "final spin/tumble" cycle

## High Speed Extract

Speed Queen's frontloading washer features a 1000 RPM spin speed for maximum water removal from clothes and faster drying.


## Front Mount Supply Dispenser

Automatically adds detergent, liquid bleach and liquid softener.



[www.speedqueen.com](http://www.speedqueen.com)

## Horizontal Axis Washer Design

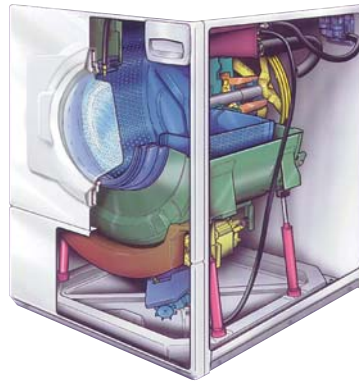

## Attractive Control Panel

Commercial frontload washers have attractive styling to match electric or gas dryers.



## Energy Efficient

Ultra low water consumption uses only 18.5 gal. per average load. This uses 15 to 16 gal. less than a commercial topload washer based on DOE appendix "J1" test.



<b>Model</b>	SWR961/SWR963
<b>Basket Volume - cu. ft (liters)</b>	2.84 (80)
<b>Cycles</b>	3 <ul style="list-style-type: none"> <li>• Regular</li> <li>• Permanent Press</li> <li>• Delicate</li> </ul>
<b>Wash/Rinse Temp.</b>	<ul style="list-style-type: none"> <li>• Hot/Cold</li> <li>• Warm/Cold</li> <li>• Cold/Cold</li> </ul>
<b>Features</b>	
<b>Wash Tub</b>	Stainless Steel
<b>Drain Type</b>	Pump/Gravity
<b>Supply Dispenser</b>	Detergent, Liquid Bleach, Liquid Fabric Softener
<b>Top and Lid Finish</b>	Porcelain
<b>Colors</b>	White, Bisque
<b>Operating Speeds</b>	
<b>Wash/Tumble</b>	Delicate - 41 Normal - 50
<b>Distribution</b>	80
<b>Spin Speeds - RPM</b>	500, 650, 1000
<b>Specifications</b>	
<b>Motor HP</b>	Variable Speed
<b>Electronic Drive Protected</b>	Induction, 3/4 HP
<b>Electrical</b>	120/60/1 • 15 amp
<b>Water Pressure - psi (bar)</b>	20-120 (1.4/8.3)
<b>Width - in (mm)</b>	26 7/8" (683)
<b>Depth - in (mm)</b>	28" (711)
<b>Height* - in (mm)</b>	43" (1092)
<b>Work Surface Height - in (mm)</b>	36" (910)
<b>Weight - lb (kg)</b>	240 (109)
<b>Shipping Weight - lb (kg)</b>	260 (118)
<b>Agency Approvals</b>	UL
<small>Motor: 3/4 HP reversing, permanently lubricated. Electrical Requirements: Grounded 3-wire, 120V, 60 Hz AC, 15 amp circuit separately fused.</small>	

\* Heights may vary slightly depending on leveling adjustments.

Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems manufacturing facilities are registered as ISO 9001:2000 compliant. Features and certifications may vary by model.

©Copyright 2006 Alliance Laundry Systems LLC

