

COIN & CARD-OPERATED

DRYERS

SDE107 SDGY09
SDG109 SDET07
SDEA07 SDGT09
SDGA09 SDEB07
SDEX07 SDGB09
SDGX09 SDEF07
SDEY07 SDGF09

STACK DRYERS

SSE107 SSGF09
SSE117 SSGF19
SSG109 SSEX07
SSG119 SSGX09
SSEA17 SSEY07
SSCA19 SSGY09
SSEB07 SSET07
SSCB09 SSET17
SSEB17 SSCT09
SSGB19 SSCT19
SSEF07 SSEY17
SSEF17 SSGY19



Speed Queen®

BUILT BETTER TO LAST LONGER

LET SPEED QUEEN LEAD THE WAY...

As America's largest commercial laundry equipment manufacturer, Speed Queen stands for innovation. As a leader in laundry technology, our electronically controlled laundry units for coin and card operation will provide you with quality, efficiency, convenience, and flexibility well into the 21st century. Since 1908 we have been committed to our tradition of quality products, backed by superior customer service.

NetMaster™ System

Speed Queen's NetMaster System of technologically advanced laundry products offers more flexibility and accountability benefits than you ever thought possible. Now you can program vend prices, cycle times, rinse options, and cycle selections while auditing machine operation simply by touching a series of control pads.



There are three options available to program your machines—manual, Micro-Wand III™ and network with NetMaster models. Whatever your needs, Speed Queen has the right option for you. It's almost like having a dryer built to your specifications. Your customers will be amazed at how easy and convenient it is to launder garments. Satisfied customers translate into profits for you.

CardMate™ Plus System

Speed Queen introduces a revolution in laundry room convenience, accountability and profitability.



The CardMate Plus System offers the industry's first commercial



washers and dryers with factory-installed, smart card reader controls on individual laundry units for cashless operation.

Both you and your customers will benefit from the convenience of CardMate Plus.

DRYERS

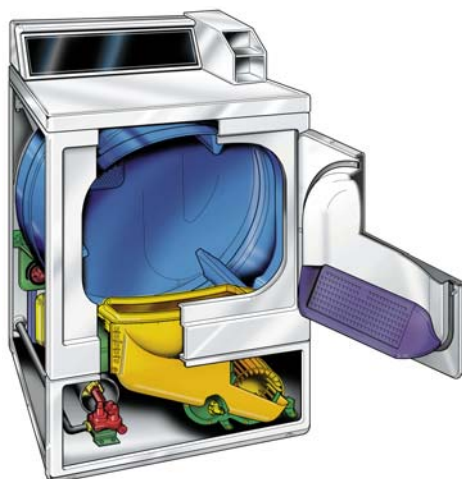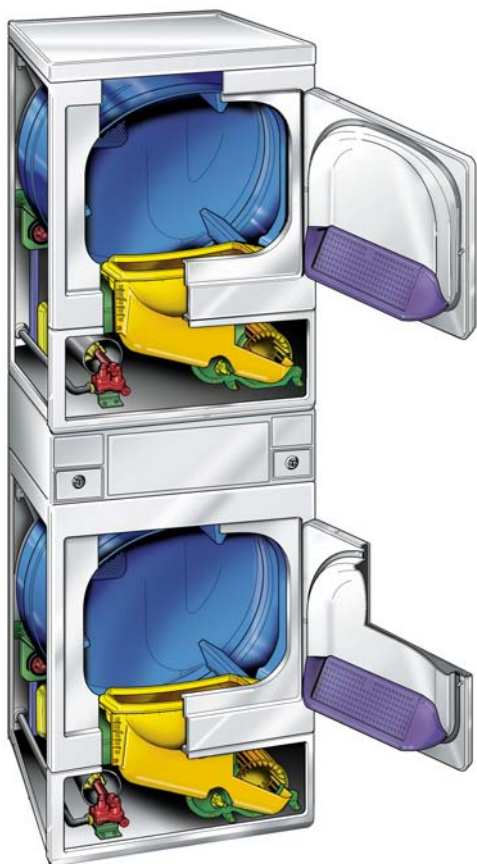

Exclusive Stack Dryer Security



Separate security module containing coin vaults for stack dryers are reinforced with 12 internal screws. Access can only be gained using special keys to vault and control panel locks. Replacement of the security module in case of vandalism is conveniently made without moving or disassembling unit.

Large Dryer Window

Our dryer window is now 50% larger, enabling customers greater visibility of the drying process.



High Security System

Vandals won't care to risk the time, energy, and noise required to break into Speed Queen's redesigned dryer. Our innovative meter case design contains 40% more solid metal with a new double-wrapped metal front, making it twice as hard to break into. A sturdy metal plate and heavy-duty bolts reinforce the security of Speed Queen's enhanced meter case to the top of the dryer. Our new coin drop is now available on our complete line of electronically controlled equipment. Its all-metal design reduces coin jamming and provides superior coin validation.



Large Door Opening

Our new dryer door opening is 2.06 sq. ft. (1914 sq. cm.), the largest in the industry. Makes loading and unloading even easier.



7.0 Cubic Foot (201 liters) Cylinder Capacity

The extra large cylinder capacity provides increased tumble action and superior handling of permanent press fabrics. It accommodates the largest loads for greater customer satisfaction.



Front Serviceability

Our 2-piece front panel increases ease of service. Motor, blower, heating element, gas valve and thermostats can be serviced through the lower panel without disconnecting the door switch. All panels for gas and electric are the same, reducing service parts inventory.



Large Upfront Lint Filter



Convenient to reach and easy to clean, this lint filter is positioned so that customers will not be bothered by it and clothing will not fall into it.

Control Options



Fully programmable NetMaster™ control



Micro-DISPLAY control (MDC)



Electro-Mechanical control

Our advanced NetMaster and Micro-DISPLAY Control™ (MDC) panel makes it easy for customers to locate the vend price, cycle times, cycle selections, and remaining cycle time. Customers will appreciate knowing the status of their laundry which gives them the ability to be more efficient with their time.

Our electro-mechanical panel offers fabric selector options, along with a light indicating when the dryer is in use.

Activation Options



Single Coin Drop

Speed Queen offers many activation options to meet your specific market needs.



Dual Coin Drop

The coin drop with its all-metal design, reduces coin jamming and provides superior coin validation.

Dual coin drop options are available for various coin denominations.



World Coin Drop

Using electronic signature recognition technology, the World Coin Drop kit offers superior coin validation and comes pre-programmed to accept coins and/or metallic tokens for your market.



Card-Activated

The CardMate Plus system offers the convenience and safety of a cashless operation. (North America Only)



Coin Slide

Coins slides offer simple, dependable operation.

3 YEAR LIMITED WARANTY



At Speed Queen, we're so confident that our heavy duty commercial dryers are built better to last longer, that we're offering the following limited warranty to prove it:

Through three years*
any part of the dryer.

*Parts only, labor not included.
See Speed Queen Warranty Bond for specifics.

DRYER & STACK DRYER SPECIFICATIONS

DRYERS

	SDE107 SDG109	SDEA07* / SDEX07* SDGA09* / SDGX09 SDEB07* / SDET07 SDGB09* / SDGT09	SDEF07 / SDEY07 SDGF09 / SDGY09
Control	E-mech/Coin	MDC/NetMaster/Coin	MDC/NetMaster/Card
Width - in (mm)	26 7/8" (683)	26 7/8" (683)	26 7/8" (683)
Depth - in (mm)	28" (711)	28" (711)	28" (711)
Height - in (mm)	43" (1092)	43" (1092)	43" (1092)
Work Surface Height - in (mm)	36" (914)	36" (914)	36" (914)
Cylinder Volume - cu. ft. (liters)	7.0 (198)	7.0 (198)	7.0 (198)
Motor HP	60 Hz: 1/3 HP, 5.5 amps 50 Hz: 1/3 HP, 3.0 amps	60 Hz: 1/3 HP, 5.5 amps 50 Hz: 1/3 HP, 3.0 amps	60 Hz: 1/3 HP, 5.5 amps 50 Hz: 1/3 HP, 3.0 amps
Motor RPM	60 Hz: 1725 50 Hz: 1425	60 Hz: 1725 50 Hz: 1425	60 Hz: 1725 50 Hz: 1425
Btu Per Hour	25,000 (6,300 kcal)	25,000 (6,300 kcal)	25,000 (6,300 kcal)
Heating Element (Electric)	60 Hz: 5350 Watts, 240 volt. Also 4750; 208 volt. 50 Hz: 4800 Watts, 230 volt.	60 Hz: 5350 Watts, 240 volt. Also 4750; 208 volt. 50 Hz: 4800 Watts, 230 volt.	60 Hz: 5350 Watts, 240 volt. Also 4750; 208 volt. 50 Hz: 4800 Watts, 230 volt.
Type of Gas (Gas models only)	Factory-equipped for natural/mixed gas. Convertible to LP gas.†	Factory-equipped for natural/mixed gas. Convertible to LP gas.†	Factory-equipped for natural/mixed gas. Convertible to LP gas.†
Utility Connections - in (mm)	3/8" NPT (9.5)	3/8" NPT (9.5)	3/8" NPT (9.5)
Air Outlet Diameter - in (mm)	4" (102)	4" (102)	4" (102)
Exhaust Airflow** - cfm (liters/sec.)	220 (105)	220 (105)	220 (105)
Maximum Exhaust Static Back Pressure	60 Hz: 0.6" W.C. 50 Hz: 0.4" W.C.	60 Hz: 0.6" W.C. 50 Hz: 0.4" W.C.	60 Hz: 0.6" W.C. 50 Hz: 0.4" W.C.
Door Type	N/A	N/A	N/A
Electrical Specifications Circuit Requirements	Electric: 120/240/60/1-30 amp 120/208/60/1-30 amp* 230/50/1-30 amp Gas: 120/60/1-15 amp 230/50/1-10 amp*	Electric: 120/240/60/1-30 amp 120/208/60/1-30 amp* 230/50/1-30 amp* (A07 and X07 only) Gas: 120/60/1-15 amp 230/50/1-10 amp* (X09 only)	Electric: 120/240/60/1-30 amp 120/208/60/1-30 amp Gas: 120/60/1-15 amp
Colors	White, Bisque	White, Bisque	White
Net Weight - lb (kg) (Approx.)	Electric: 135 (61) Gas: 140 (64)	Electric: 135 (61) Gas: 140 (64)	Electric: 135 (61) Gas: 140 (64)
Shipping Weight - lb (kg)	Electric: 145 (66) Gas: 150 (68)	Electric: 145 (66) Gas: 150 (68)	Electric: 145 (66) Gas: 150 (68)
Agency Approvals	Electric Models: UL Gas Models: CSA Star	Electric Models: UL Gas Models: CSA Star	Electric Models: UL Gas Models: CSA Star

* Models not available in Bisque.

** Measured at point of exit from dryer.

† IMPORTANT: Any product revisions or conversions must be made by the Manufacturer's Authorized Dealers, Distributors, or local service personnel.

STACK DRYERS

SSE107 SSE117 SSG109 SSG119	SSEB07* / SSEB17* SSGB09* / SSGB19* SSEA17* / SSGA19* SSEX07* / SSET07* SSGX09* / SSGT09* SSET17 / SSGT19	SSEF07 / SSEF17 SSGF09 / SSGF19 SSEY07 / SSGY09 SSEY17 / SSGY19
E-mech/Coin	MDC/NetMaster/Coin	MDC/NetMaster/Card
26 7/8" (683)	26 7/8" (683)	26 7/8" (683)
28" (711)	28" (711)	28" (711)
76 5/8" (1946)	76 5/8" (1946)	N/A
N/A	N/A	N/A
7 (198)	7 (198)	7 (198)
60 Hz: 1/3 HP, 5.5 amps 50 Hz: 1/3 HP, 3.0 amps	60 Hz: 1/3 HP, 5.5 amps 50 Hz: 1/3 HP, 3.0 amps	60 Hz: 1/3 HP, 5.5 amps 50 Hz: 1/3 HP, 3.0 amps
60 Hz: 1725 50 Hz: 1425	60 Hz: 1725 50 Hz: 1425	60 Hz: 1725 50 Hz: 1425
25,000 (6,300 kcal)	25,000 (6,300 kcal)	25,000 (6,300 kcal)
60 Hz: 5350 Watts, 240 volt. Also 4750; 208 volt. 50 Hz: 4800 Watts, 230 volt.	60 Hz: 5350 Watts, 240 volt. Also 4750; 208 volt. 50 Hz: 4800 Watts, 230 volt.	USA: 5350 Watts, 240 volt. Also 4750; 208 volt. 50 Hz: 4800 Watts, 230 volt.
Factory-equipped for natural/mixed gas. Convertible to LP gas.†	Factory-equipped for natural/mixed gas. Convertible to LP gas.†	Factory-equipped for natural/mixed gas. Convertible to LP gas.†
3/8" NPT (9.5)	3/8" NPT (9.5)	3/8" NPT (9.5)
4" (102)	4" (102)	4" (102)
220 (105)	220 (105)	220 (105)
60 Hz: 0.6" W.C. 50 Hz: 0.4" W.C.	60 Hz: 0.6" W.C. 50 Hz: 0.4" W.C.	60 Hz: 0.6" W.C. 50 Hz: 0.4" W.C.
Solid Door (SSET07 and SSGT09) See-Thru Door (SSET17 and SSGT19)	Solid Door (SSET07 and SSGT09) See-Thru Door (SSET17 and SSGT19)	Solid Door (SSET07 and SSGT09) See-Thru Door (SSET17 and SSGT19)
Electric: 120/240/60/1-30 amp 120/208/60/1-30 amp* 230/50/1-30 amp (117 only) Gas: 120/60/1-15 amp 230/50/1-10 amp* (119 only)	Electric: 120/240/60/1-30 amp 120/208/60/1-30 amp* 230/50/1-30 amp* (X07 only) Gas: 120/60/1-15 amp 230/50/1-10 amp* (X09 only)	Electric: 120/240/60/1-30 amp 120/208/60/1-30 amp* Gas: 120/60/1-15 amp
White, Bisque	White, Bisque	White
Electric: 265 (120) Gas: 275 (125)	Electric: 265 (120) Gas: 275 (125)	Electric: 265 (120) Gas: 275 (125)
Electric: 280 (127) Gas: 290 (132)	Electric: 280 (127) Gas: 290 (132)	Electric: 280 (127) Gas: 290 (132)
Electric Models: UL Gas Models: CSA Star	Electric Models: UL Gas Models: CSA Star	Electric Models: UL Gas Models: CSA Star

Due to continuous product improvements, design and specifications subject to change without notice.

The quality management systems at all Alliance Laundry Systems manufacturing facilities are registered as ISO9001:2000 compliant. Features and certifications may vary by model.

©Copyright 2005 Alliance Laundry Systems LLC



www.speedqueen.com

Speed Queen®
Alliance Laundry Systems